


G003 - NITRA-NEO

Mechanical Protection Nitrile

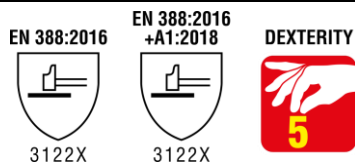

Features

- Versatile
- Light nitrile and oil resistant

Coating

Smooth nitrile

Lining

Polyester

Gauge

13

Colour

White/grey

Application

Warehouse, packaging, mechanical industry, agriculture

Sizes

| | | | | |
|-------|-------|-------|---------|----------|
| 7 (S) | 8 (M) | 9 (L) | 10 (XL) | 11 (XXL) |
|-------|-------|-------|---------|----------|

Lenght

| | | | | |
|-------|-------|-------|-------|-------|
| 23 cm | 24 cm | 25 cm | 26 cm | 27 cm |
| 9" | 9,5" | 9,9" | 10,2" | 10,6" |



MAXIMUM VERSATILITY



Packaging

Code

Quantity

G003-D101

1 dozen (12 single packed gloves)

G003-DD01

1 dozen (1 bag containing 12 pairs)

G003-K101

Carton containing 20 dozen (240 single packed gloves)

G003-KD01

Carton containing 20 dozen (20 bags containing 12 pairs)

SAFETY TECHNICAL SPECIFICATIONS

The PPE is in compliance with essential requirements of (EU) 2016/425 regulation

| STANDARD | DESCRIPTION | RESULT REACHED |
|-------------------|---|------------------|
| EN ISO 21420:2020 | Protective gloves - General requirements and test methods | COMPLIANT |

| STANDARD | DESCRIPTION | | LEVEL | | | | | LEVEL REACHED |
|-------------------------------------|---|----------|-------|-------|-------------------|--------|--------|---------------|
| | | | 1 | 2 | 3 | 4 | 5 | |
| EN 388:2016+A1:2018 | Abrasion resistance (number of frictions) | | ≥ 100 | ≥ 500 | ≥ 2000 | ≥ 8000 | - | 3 |
| EN 388:2016+A1:2018 | Cutting test : blade cut resistance (index) | | ≥ 1,2 | ≥ 2,5 | ≥ 5,0 | ≥ 10,0 | ≥ 20,0 | 1 |
| EN 388:2016+A1:2018 | Tear resistance (N) | | ≥ 10 | ≥ 25 | ≥ 50 | ≥ 75 | - | 2 |
| EN 388:2016+A1:2018 | Puncture resistance (N) | | ≥ 20 | ≥ 60 | ≥ 100 | ≥ 150 | - | 2 |
| EN 388:2016+A1:2018 - EN ISO 13997 | TDM : cutting resistance (N) | A | B | C | D | E | F | X |
| | | ≥ 2 | ≥ 5 | ≥ 10 | ≥ 15 | ≥ 22 | ≥ 30 | |
| EN 388:2016+A1:2018 - EN 13594:2015 | Impact protection | P | | | ABSENT | | | ABSENT |
| | | Achieved | | | Test not executed | | | |

If one of the marking indexes is marked with:

- letter "X" means that the test wasn't executed or not applicable;
- number "0" means that the test was executed but the minimum performance level hasn't been achieved