


G015 - SKINPROOF

Mechanical Protection Nitrile



"It is possible that gloves marked with previous standards are despatched. Cofra grants that all productions do not have technical and quality differences."

Features

- *Oil Protection Technology* - Double layer coating resistant to oils and greases
- Nylon lining, elastane - gauge 15, which guarantees excellent wearability and dexterity
- Coating up to the knuckles for a greater balance between protection and breathability
- Excellent protection against oils and grease
- Superb grip on oily surfaces, thanks to their special sand finished nitrile coating
- High abrasion resistance
- Superb grip on oily surfaces, thanks to their special sand finished nitrile coating

Coating

Sand finished nitrile coating up to the knuckles, double-layer

Lining

Nylon/elastane

Gauge

15

Colour

Blue-green/black

Application

Setup, contact with oils and fats, building and construction, mechanical and car industry, handling of metal parts even oily or dirty, maintenance

Sizes

8 (M)	9 (L)	10 (XL)	11 (XXL)
-------	-------	---------	----------

Lenght

24 cm	25 cm	26 cm	27 cm
9,5"	9,9"	10,2"	10,6"



SUPERB GRIP ON OILY SURFACES




Packaging

Code	Quantity
G015-D100	1 dozen (12 single packed gloves)
G015-DD00	1 dozen (1 bag containing 12 pairs)
G015-K100	Carton containing 12 dozen (144 single packed gloves)
G015-KD00	Carton containing 12 dozen (12 bags containing 12 pairs)

Oil Protection Technology

Double layer coating resistant to oils and greases. The internal layer resists to oil penetration and enhances durability. The sandblasted external layer resists to oils, providing a safe hold. The *Oil Protection Technology* line offers a range of various models, different from each other in terms of use and type of coating.

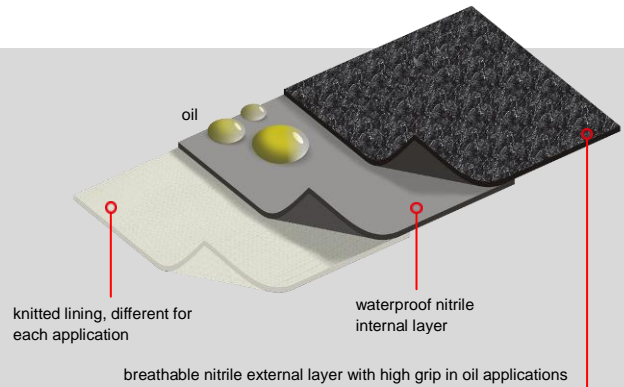

Mechanical Protection			Cut Protection	Cold Protection
Palm coating	¾ coating	Total coating	Total coating	¾ coating
				
OILPROOF	SKINPROOF	TOTAL PROOF	BLACK DEEP	BUCKLER
Breathability ●●●●	Breathability ●●●●	Breathability ●●●●	Breathability ●●●●	Breathability ●●●●
Impermeability ●●●●	Impermeability ●●●●	Impermeability ●●●●	Impermeability ●●●●	Impermeability ●●●●
Abrasion resistance ●●●●	Abrasion resistance ●●●●	Abrasion resistance ●●●●	Abrasion resistance ●●●●	Abrasion resistance ●●●●

SAFETY TECHNICAL SPECIFICATIONS

The PPE is in compliance with essential requirements of (EU) 2016/425 regulation

STANDARD	DESCRIPTION	RESULT REACHED
EN ISO 21420:2020	Protective gloves - General requirements and test methods	COMPLIANT

STANDARD	DESCRIPTION		LEVEL					LEVEL REACHED
			1	2	3	4	5	
EN 388:2016+A1:2018	Abrasion resistance (number of frictions)		≥ 100	≥ 500	≥ 2000	≥ 8000	-	4
EN 388:2016+A1:2018	Cutting test : blade cut resistance (index)		≥ 1,2	≥ 2,5	≥ 5,0	≥ 10,0	≥ 20,0	1
EN 388:2016+A1:2018	Tear resistance (N)		≥ 10	≥ 25	≥ 50	≥ 75	-	3
EN 388:2016+A1:2018	Puncture resistance (N)		≥ 20	≥ 60	≥ 100	≥ 150	-	1
EN 388:2016+A1:2018 - EN ISO 13997	TDM : cutting resistance (N)	A	B	C	D	E	F	X
		≥ 2	≥ 5	≥ 10	≥ 15	≥ 22	≥ 30	
EN 388:2016+A1:2018 - EN 13594:2015	Impact protection	P			ABSENT			ABSENT
		Achieved			Test not executed			

If one of the marking indexes is marked with:

- letter "X" means that the test wasn't executed or not applicable;
- number "0" means that the test was executed but the minimum performance level hasn't been achieved