


# G047 - SOARING

## Mechanical Protection Polyurethane

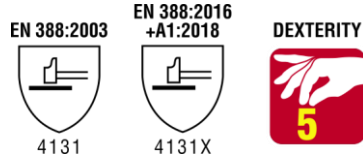

*It is possible that gloves marked with previous standards are despatched. Cofra grants that all productions do not have technical and quality differences.*

### Features

- Excellent dexterity
- Excellent resistance
- Versatile and light
- Breathable

### Coating

Polyurethane

### Lining

Polyester

### Gauge

13

### Colour

Grey/grey

### Application

Building and construction, mechanical, warehouse, packaging, assembly, agriculture, maintenance

### Sizes

6 (XS)	7 (S)	8 (M)	9 (L)	10 (XL)	11 (XXL)
--------	-------	-------	-------	---------	----------

### Lenght

22 cm	23 cm	24 cm	25 cm	26 cm	27 cm
8,7"	9"	9,5"	9,9"	10,2"	10,6"



**LIGHT AND BREATHABLE**



### Packaging

Code	Quantity
G047-D101	1 dozen (12 single packed gloves)
G047-K101	Carton containing 20 dozen (240 single packed gloves)

## SAFETY TECHNICAL SPECIFICATIONS

The PPE is in compliance with essential requirements of (EU) 2016/425 regulation

STANDARD	DESCRIPTION	MINIMUM REQUIREMENT / RANGE	RESULT REACHED
EN 420:2003 + A1 2009	pH determination (palm)	3,5 < pH < 9,5	<b>6,7</b>
EN 420:2003 + A1 2009	pH determination (back)	3,5 < pH < 9,5	<b>7,1</b>
EN 420:2003 + A1 2009	pH determination (cuff)	3,5 < pH < 9,5	<b>7,1</b>
UNI EN 14362-1/3:2012	Carcinogenic and aromatic amines	≤ 30 ppm	<b>&lt; 5</b>
EN ISO 21420:2020	Further technical specifications applied	COMPLIANT / NOT COMPLIANT	<b>COMPLIANT</b>

STANDARD	DESCRIPTION		LEVEL					LEVEL REACHED
			1	2	3	4	5	
EN 388:2016+A1:2018	Abrasion resistance (number of frictions)		≥ 100	≥ 500	≥ 2000	≥ 8000	-	4
EN 388:2016+A1:2018	Cutting test : blade cut resistance (index)		≥ 1,2	≥ 2,5	≥ 5,0	≥ 10,0	≥ 20,0	1
EN 388:2016+A1:2018	Tear resistance (N)		≥ 10	≥ 25	≥ 50	≥ 75	-	3
EN 388:2016+A1:2018	Puncture resistance (N)		≥ 20	≥ 60	≥ 100	≥ 150	-	1
EN 388:2016+A1:2018 - EN ISO 13997	TDM : cutting resistance (N)	A	B	C	D	E	F	X
		≥ 2	≥ 5	≥ 10	≥ 15	≥ 22	≥ 30	
EN 388:2016+A1:2018 - EN 13594:2015	Impact protection	P			ABSENT			ABSENT
		Achieved			Test not executed			

If one of the marking indexes is marked with:

- letter "X" means that the test wasn't executed or not applicable;
- number "0" means that the test was executed but the minimum performance level hasn't been achieved.